


N1 4/3 Sinus

Profile:



Side lap detail:

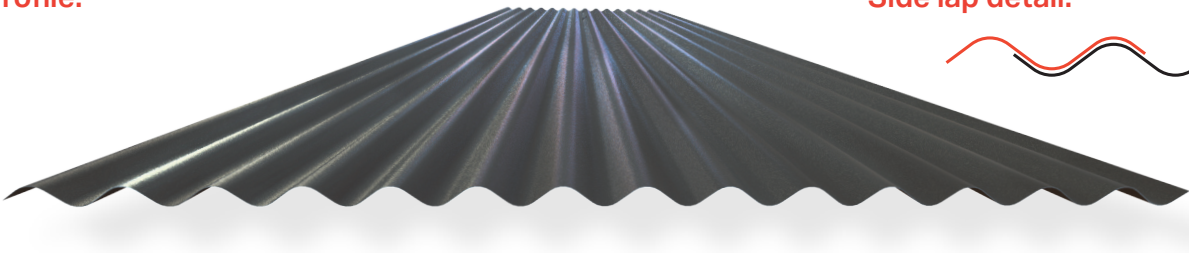

N14/3 Sinus:



Profile Geometry:

Cover Width:	Profile Depth:	Pitch:	Crown Width:	Trough Width:	Gauge:	Weight:
990mm	19mm	76mm	R19	R19	0.5mm 0.7mm	4.8kg/m ² 6.7kg/m ²

Profiles Manufacture in accordance with BS EN 14782

Self Curve - Min 40m Radius

Product Specification:

Sheet Length

- Min Length - 1 Metres
- Max Standard Length** -8 Metres

Fire Classification

- Single Skin - Broof t4
- Protex® System - Broof t4

External Finish:

	<u>Mission XP40®</u>	<u>Granite® HDX</u>	<u>GreenCoat® Hiarc Max</u>	<u>GreenCoat® Pural BT</u>
External Finish Warranty*	40 Years	35 Years	40 Years	40 Years
External Finish Thickness	200 Microns	55 Microns	40 Microns	50 Microns
Appearance	Steon®	Slight Texture	Slight Texture	Slight Texture
Colour Range	Solid	Solid & Metallic	Solid & Metallic	Solid & Metallic
Corrosion Classification	RC5	RC5	RC5	RC5
UV Classification	RUV4	RUV4	RUV5	RUV4
Fire Classification	C,S2-D0	A1/A2	A1	A1
Upgrade to Low Embodied Carbon Steel	✓	-	-	✓

* Warranty subject to application, colour and location.

** Max length subject to transport limitations. For lengths outside the limitations, speak to the team.

Below Typical Fixing Detail: Roof Application

Sheet Ends

- Every 3no Crowns - Main Fix

Intermediate Supports


- Every 3no Crowns - Main Fix

End laps

- Every 3no Crowns - Main Fix
- Sealant – 2x Runs 6x5mm Butyl Mastic

Side Lap

- 450mm Centres - Stitcher Fixing
- Sealant – 1x Run 6x5mm Butyl Mastic

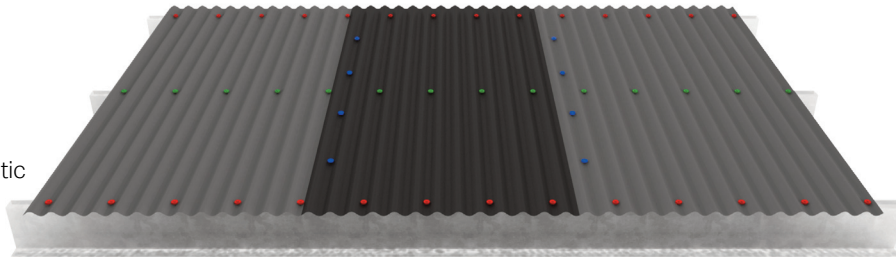

Load Tables

Positive Imposed Load (Gravity and Uplift) kN/m²

L/200
Span (m)

Span Type	Gauge (mm)	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5
Single Span 	0.5	1.75	1.31	1.01	0.8	0.64	0.52	0.43	0.36	0.3	0.25	0.22	0.19	0.16	0.14	0.13	0.11
	0.7	2.45	1.84	1.42	1.11	0.89	0.73	0.60	0.50	0.42	0.36	0.31	0.26	0.23	0.20	0.18	0.16
Double Span 	0.5	2.91	2.19	1.69	1.33	1.06	0.86	0.71	0.59	0.5	0.42	0.36	0.31	0.27	0.24	0.21	0.19
	0.7	4.08	3.06	2.36	1.86	1.49	1.21	1.00	0.83	0.70	0.59	0.51	0.44	0.38	0.34	0.30	0.26
Multi Span 	0.5	2.91	2.19	1.69	1.33	1.06	0.86	0.71	0.59	0.5	0.42	0.36	0.31	0.27	0.24	0.21	0.19
	0.7	4.08	3.06	2.36	1.86	1.49	1.21	1.00	0.83	0.70	0.59	0.51	0.44	0.38	0.34	0.30	0.26

Positive & Negative Imposed Load (Gravity and Uplift) kN/m²

L/150
Span (m)

Span Type	Gauge (mm)	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5
Single Span 	0.5	2.33	1.75	1.35	1.06	0.85	0.69	0.57	0.47	0.4	0.34	0.29	0.25	0.22	0.19	0.17	0.15
	0.7	3.26	2.45	1.89	1.49	1.19	0.97	0.80	0.66	0.56	0.48	0.41	0.35	0.31	0.27	0.24	0.21
Double Span 	0.5	3.41	2.82	2.25	1.77	1.42	1.15	0.95	0.79	0.67	0.57	0.49	0.42	0.36	0.32	0.28	0.25
	0.7	4.77	3.94	3.15	2.48	1.98	1.61	1.33	1.11	0.93	0.79	0.68	0.59	0.51	0.45	0.39	0.35
Multi Span 	0.5	3.88	2.92	2.25	1.77	1.42	1.15	0.95	0.79	0.67	0.57	0.49	0.42	0.36	0.32	0.28	0.25
	0.7	5.44	4.09	3.15	2.48	1.98	1.61	1.33	1.11	0.93	0.79	0.68	0.59	0.51	0.45	0.39	0.35

Negative Imposed Load (Gravity and Uplift) kN/m²

L/90
Span (m)

Span Type	Gauge (mm)	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5
Single Span 	0.5	3.41	2.82	2.25	1.77	1.42	1.15	0.95	0.79	0.67	0.57	0.49	0.42	0.36	0.32	0.28	0.25
	0.7	4.77	3.94	3.15	2.48	1.98	1.61	1.33	1.11	0.93	0.79	0.68	0.59	0.51	0.45	0.39	0.35
Double Span 	0.5	3.41	2.82	2.37	2.02	1.74	1.51	1.33	1.18	1.05	0.94	0.81	0.7	0.61	0.53	0.47	0.41
	0.7	4.77	3.94	3.31	2.82	2.43	2.12	1.86	1.65	1.47	1.32	1.13	0.98	0.85	0.75	0.66	0.58
Multi Span 	0.5	4.26	3.52	2.96	2.52	2.17	1.89	1.58	1.32	1.11	0.94	0.81	0.7	0.61	0.53	0.47	0.41
	0.7	5.96	4.93	4.14	3.53	3.04	2.65	2.21	1.85	1.55	1.32	1.13	0.98	0.85	0.75	0.66	0.58

- Yield Stress (N/mm²) S280
- Load Factor - 1.5
- Figures shaded governed by deflection
- Fixing Checks must be considered separately
- Load Span Tables to EN 1993-1-3 (Eurocode EC3)