


| SR35+


Technical Drawing



Side Lap Detail

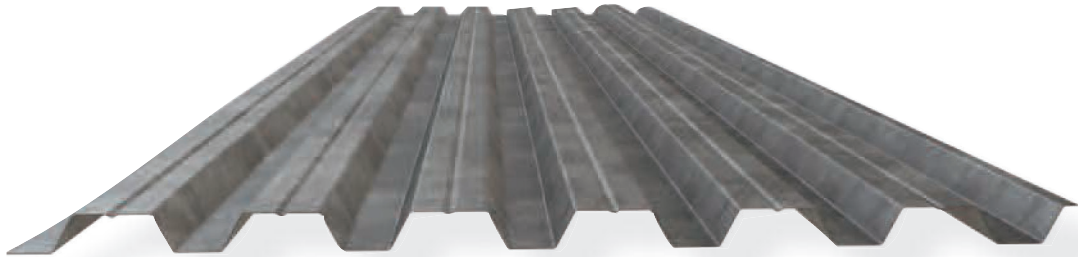

Profile

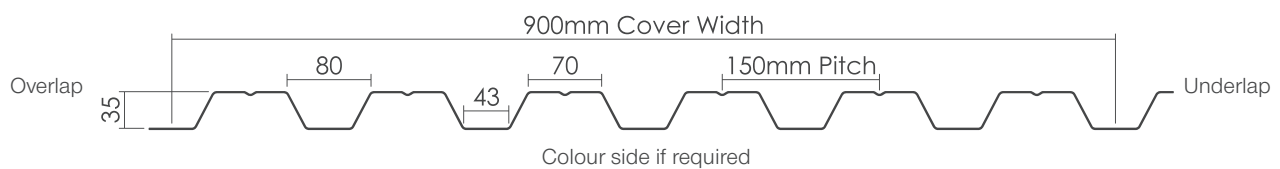

Profile Properties

- Cover Width 900mm
- Profile Depth 35mm
- Pitch 150mm
- Crown Width 70mm
- Valley Width 43mm
- Thickness available 0.7mm / 0.9mm / 1.2mm

Coating Options

- **Galvanised** Hot dip galvanised with a minimum coating mass of 275g/m² (S350GD-Z275)
- **Polyester White** Hot dip galvanised with a minimum coating mass of 150g/m² (S350GD-Z150) with 25 micron bright white polyester to the interior surface

Options

- S350 Grade Steel in accordance with BS EN 10143:2016 and BS EN 10346:2015
- 0.7mm, 0.9mm and 1.2mm gauge options available to suit common spacings of purlins
- Maximum Sheet Lengths up to 12m

Fire Classification

- Class A1 - Reaction to Fire
- Class 1 - BS476 Part 7
- Class O - Current Building Regulations

Standard Fixing Detail

Sheet Ends


- Every Trough - Main Fix
- End Lap 150mm

Intermediate Fix

- Alternate trough - Main Fix

Side Lap

- Side Lap - Not essential
- Side Supports - 450mm Centres

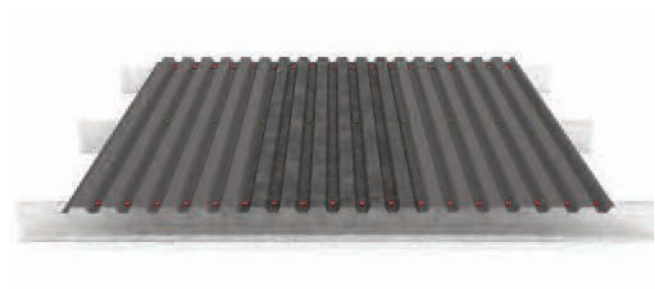

| SR35+

Section Properties

Nominal Thickness	Available Grades	Depth of Profile	Nominal Weight of Profile		Area of Steel	Top flange in compression		Bottom flange in compression	
						Moment of Capacity	Moment of Inertia	Moment of Capacity	Moment of Inertia
mm	N/mm ²	mm	kg/m ²	kN/m ²	mm ² /m	kNm/m	cm ⁴ /m	kNm/m	cm ⁴ /m
0.7	S350	35	7.58	0.07	917	3.42	20.1	2.95	19.7
0.9	S350	35	9.76	0.10	1194	4.12	23.2	3.52	21.3
1.2	S350	35	13.03	0.13	1611	7.45	35.7	6.60	35.7

Section properties are calculated in accordance with Eurocode 3

Load Tables

Positive Imposed Load (Gravity) kN/m²

Span Type		Span (m)																	
	Gauge (mm)	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	
Single Span 	0.7	9.38	7.37	5.90	4.80	3.96	3.30	2.78	2.36	2.03	1.75	1.52	1.33	1.17	1.04	0.92	0.82	0.74	
	0.9	10.98	8.63	6.91	5.62	4.63	3.86	3.25	2.77	2.37	2.05	1.78	1.56	1.37	1.21	1.08	0.96	0.86	
	1.2	16.64	13.09	10.48	8.52	7.02	5.85	4.93	4.19	3.59	3.10	2.70	2.36	2.08	1.84	1.64	1.46	1.31	
Double Span 	0.7	5.59	4.99	4.48	4.05	3.69	3.37	3.09	2.85	2.63	2.44	2.27	2.12	1.98	1.86	1.75	1.62	1.45	
	0.9	8.62	7.67	6.88	6.20	5.63	5.13	4.70	4.32	3.95	3.41	2.97	2.60	2.29	2.02	1.80	1.61	1.44	
	1.2	14.47	12.85	11.49	10.35	9.37	8.53	7.80	7.16	6.60	6.10	5.58	4.88	4.30	3.80	3.38	3.02	2.71	
Multi Span 	0.7	6.59	5.90	5.31	4.81	4.38	4.01	3.68	3.40	3.15	2.92	2.72	2.54	2.31	2.04	1.81	1.62	1.45	
	0.9	10.22	9.11	8.18	7.39	6.71	6.13	5.42	4.61	3.95	3.41	2.97	2.60	2.29	2.02	1.80	1.61	1.44	
	1.2	17.18	15.29	13.70	12.36	11.21	10.21	9.35	8.60	7.43	6.42	5.58	4.88	4.30	3.80	3.38	3.02	2.71	

Negative Imposed Load (Uplift) kN/m²

Span Type	Gauge (mm)	Span (m)																
		1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8
Single Span 	0.7	9.46	8.73	7.74	6.29	5.18	4.32	3.64	3.10	2.65	2.29	1.99	1.75	1.54	1.36	1.21	1.08	0.97
	0.9	13.93	10.96	8.77	7.13	5.88	4.90	4.13	3.51	3.01	2.60	2.26	1.98	1.74	1.54	1.37	1.22	1.10
	1.2	22.23	17.48	14.00	11.38	9.38	7.82	6.59	5.60	4.80	4.15	3.61	3.16	2.78	2.46	2.19	1.95	1.75
Double Span 	0.7	5.92	5.30	4.78	4.33	3.95	3.61	3.32	3.07	2.84	2.64	2.46	2.30	2.15	2.02	1.90	1.79	1.61
	0.9	8.72	7.76	6.96	6.28	5.70	5.20	4.76	4.28	4.04	3.74	3.47	3.24	2.90	2.57	2.28	2.04	1.83
	1.2	15.30	13.62	12.21	11.02	9.99	9.11	8.35	7.67	7.08	6.56	6.01	5.26	4.63	4.96	4.10	3.64	2.92
Multi Span 	0.7	6.96	6.24	5.64	5.12	4.67	4.29	3.95	3.65	3.38	3.15	2.94	2.75	2.56	2.27	2.01	1.80	1.61
	0.9	10.32	9.20	8.27	7.47	6.79	6.20	5.69	5.24	4.84	4.33	3.77	3.30	2.90	2.57	2.28	2.04	1.83
	1.2	18.11	16.15	14.51	13.11	11.92	10.88	9.98	9.19	8.00	6.91	6.01	5.26	4.63	4.10	3.64	3.25	2.92

- S350 grade steel in accordance with BS EN 10143:2016 and BS EN 10346:2015
- Tables consider deflection limits of:
 - Positive load** (Gravity) Span /200
 - Negative loads** (Uplift) Span /90
- All loads within table consider a partial factor of 1.5
- Fixing checks for uplift must be considered separately
- Tables based on bearing width (purlin) of 60mm
- Figures shaded indicate where design is governed by deflection